




ASPHALT AND CONCRETE • GENERAL CONTRACTORS

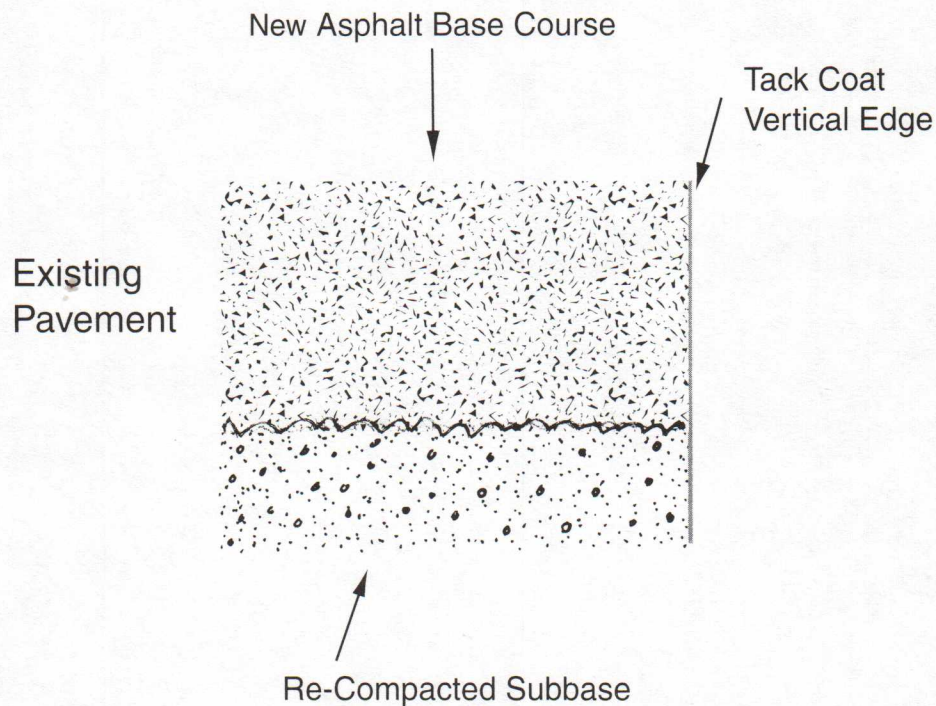

## *Asphalt Patching – Base Only*

1. Identify and mark areas of repair.
2. Using jackhammers, cut a straight vertical edge of each patch.
3. Excavate and dispose of existing asphalt down to existing subbase.
4. Searify and recompact the existing subbase using vibratory rollers or plate tampers.
5. Apply tack coat to vertical edges to create adhesion between new and old pavement.
6. Install and compact asphalt base course to be flush with existing pavement.